
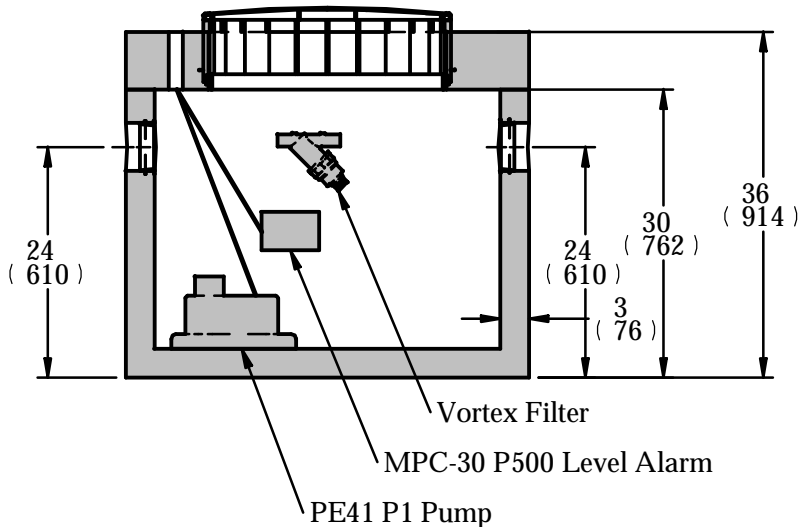


Delivery is made by crane-equipped trucks, excavation should be 1ft larger than tank dimensions and be accessible for unloading from the truck. Min overhead clearance of 18ft is required.

Kit Includes

- 1 - 80 Gal tank
- 1 - 12 x 12 Patio Slab
- 1 - PE41 P1 Pump
- 1 - MPC-30 P500 Level Alarm

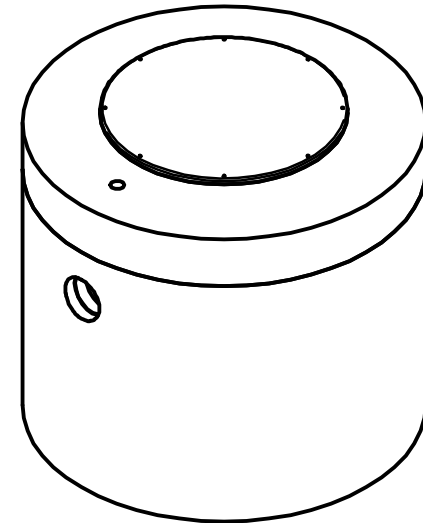

in
|mm|



CONSTRUCTION SPECIFICATIONS

Concrete Properties: 4500 PSI (32 MPa) Min Strength
6-8% Air Entrainment

Inlet & Outlet Polyseals accept up to 4" ABS pipe

Brooklin (800)655-3430
Newmarket (888)407-6443
Huntsville (800)264-3302
Haliburton (800)273-9084

36" Dia
Vortex Filter Package

BCP # 36000

Unit Weight: 1,100 lbs

DRAWN BY: TD

DATE: 26 February 2007