
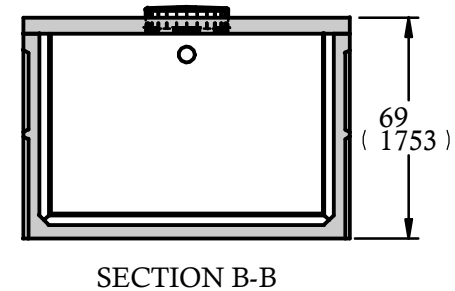


Delivery is made by crane-equipped trucks, excavation should be 1ft larger than tank dimensions and be accessible for unloading from the rear of the truck. Min overhead clearance of 18ft is required.

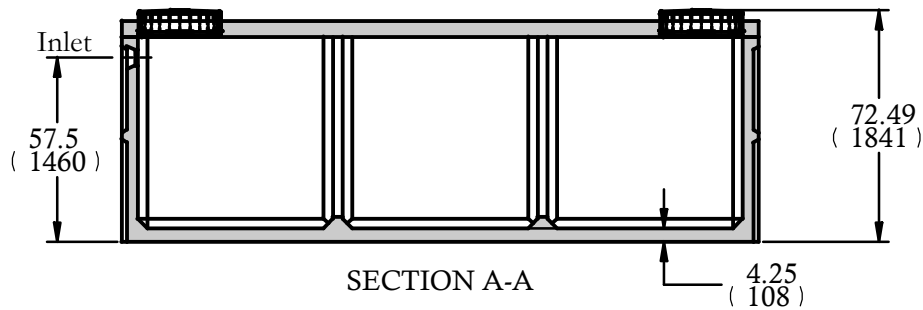

in  
| mm |

**Brooklin**  
CONCRETE

Brooklin (800)655-3430  
Newmarket (888)407-6443  
Huntsville (800)264-3302  
Haliburton (800)273-9084

CONSTRUCTION SPECIFICATIONS

Concrete Properties: 4500 PSI (32 MPa) Min Strength  
Nonsulphate Soil Design Concrete  
Concrete Design Meets All Related CSA Standards  
Inlet & Outlet Polyseals ccept up to 4" ABS Pipe  
Swiftlift Lifting Anchors in side walls  
Meets CSA-B66-05  
Reinforcing meets G30.14-M1983

3000 Gallon  
13,650 Litre  
Holding Tank

Max Cover: 30"	Unit Weight:: 28,435 lbs
Model: 3000-1CH-1PC	CPA CERTIFIED
DRAWN BY: TD	DATE: 24 August 2006